
MovieTech

CAMERA SUPPORT SOLUTIONS

NEW WAYS
TO MOVE THE
CAMERA

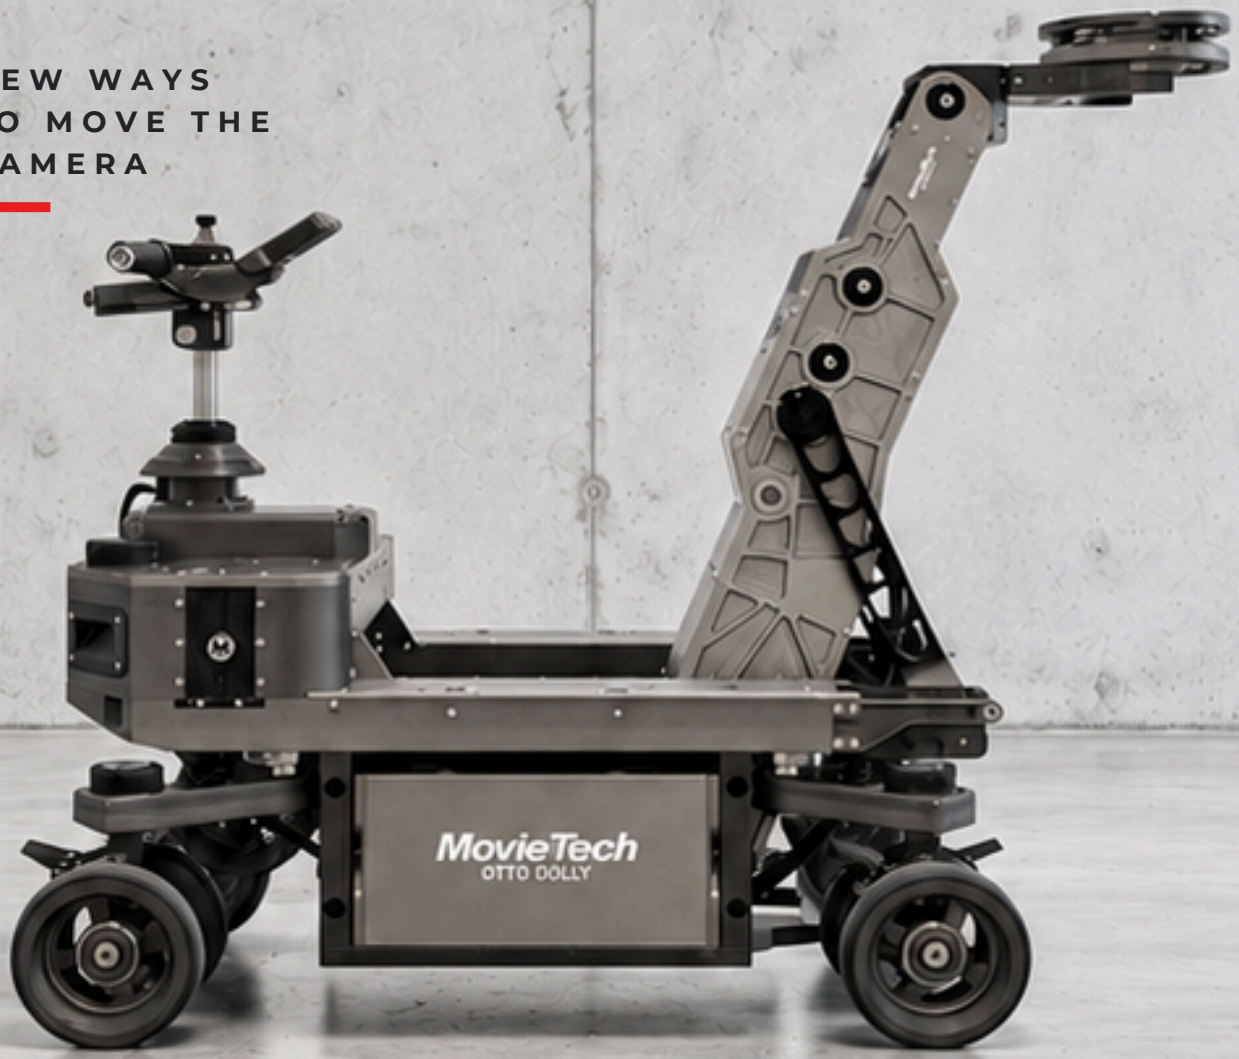

OTTO DOLLY

FAST WHEN YOU NEED IT.
SMOOTH WHEN YOU WANT IT.

Meet Otto
— a new kind of camera dolly, built to give grips more control, more possibilities and fewer limitations on set.

Its powerful electromechanical scissor arm moves through the full 85 cm / 33.5" boom range in just 1.3 seconds. Go from ultra-low to high in one fast move, create perfectly smooth lifts, or repeat the same move again and again with precision.

With a payload of up to 125 kg / 275 lb, Otto is ready for full camera setups.

Multiple mounting options and a wide range of accessories make it easy to adapt the dolly to the shot — rather than adapting the shot to the dolly.

Two independent control options give grips the choice between direct manual valve control and a programmable wireless hand control unit. Adjust movement parameters, program moves and repeat them with precision — while high-capacity battery packs keep Otto running throughout a full shooting day. This opens up entirely new possibilities for how a dolly can be operated.

Less setup. More control. More ways to get the shot.

MADE IN GERMANY


WWW.MOVIETECH.DE

MovieTech
CAMERA SUPPORT SOLUTIONS

TECHNICAL DATA

PRELIMINARY SPECS AT A GLANCE

WORK IN PROGRESS
The dolly is still in development.
Technical specifications may change

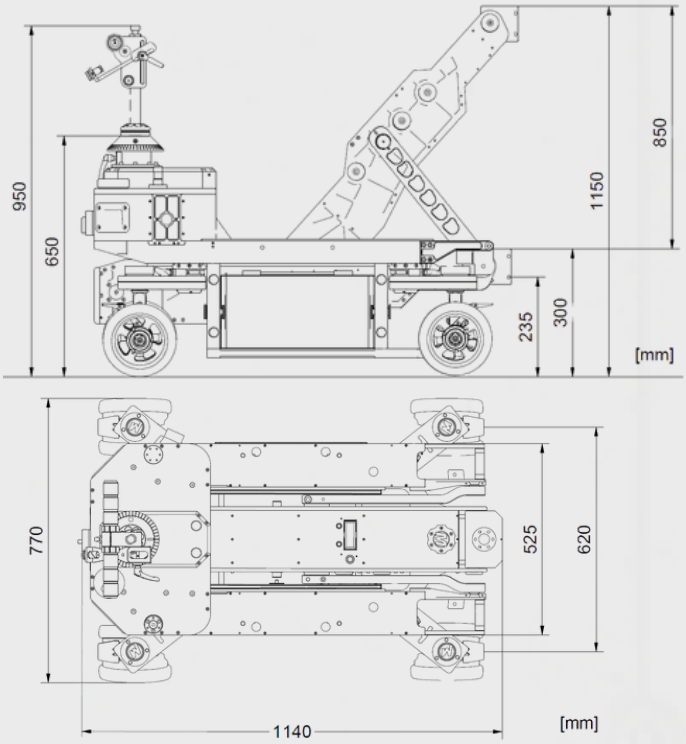

- Boom Travel: 850mm / 1,3 sec
- Highest Camera Mount: 1150 mm
- Lowest Camera Mount: 235 mm
- Payload:
  - 80kg (176lbs) at full speed
  - 125kg (275lbs) in heavy-duty mode
- Lifts on a single charge: >1500
- Width: 525mm
- Height: 950mm
- Transport Height: 650mm
- Weight:
  - Arm: 45kg
  - Chassis: 110kg
  - Battery per unit: 17kg
- Power: 48V / 22Ah
- Charging time: 5 hours
- Wireless HCU: approx 25m range
- Steering modes:
  - Crab
  - Round
  - Conventional

85 CM / 33,5"
BOOM TRAVEL
From ultra-low to full height in just 1.3 seconds.

125 KG / 275 LBS
PAYLOAD
Ready for full camera setups.
(max, 80kg / 176lbs at full speed)

1.3 SEC
FULL TRAVEL
Fast. Smooth. Repeatable.

ALL-DAY POWER
48 V / 22 AH
Keeps you moving through long days on set.

MODULAR SYSTEM

Modular by design — easy to break down, easy to transport.



WIRELESS HCU & MANUAL VALVE

Take control your way
— wireless and programmable, or classic manual valve.



